




Specifications	
Flange	WR-5.1
Frequency (GHz)	150-190
Insertion Loss (dB, typ)	2.2
Insertion Loss (dB, max)	3
Isolation (dB, typ)	21
Isolation (dB, min)	14
Return Loss (dB, typ)	21
VSWR (max)	1.6:1
Maximum Power (W)	1.0
Diamond Heatsink	Yes

WR-5.1 Hybrid Circulator

The patent-pending hybrid circulator is designed for wideband millimeter wave transmit/receive systems. The hybrid circulator is an innovative technology, combining an orthomode transducer with a Faraday rotator to achieve an order of magnitude of the bandwidth of the traditional Y-junction design. Every circulator is tested on a vector network analyzer to ensure conformity and the test data is provided to the customer.

150-190 GHz Bandwidth


- Wideband (24% fractional bandwidth)
- **♦** Internal waveguide screw access
- **♦** Anti-cocking waveguide flanges
- **♦** Resists stray magnetic fields
- **♦** Comprehensive test data
- **♦** Low insertion loss
- ♦ Patent pending

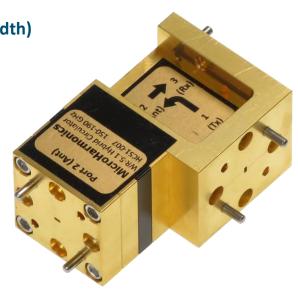






Insertion Loss and Isolation

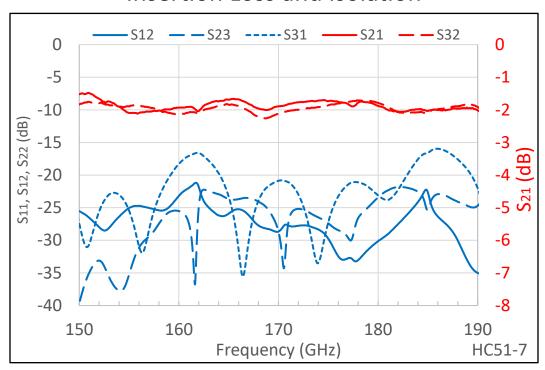

Port Reflections

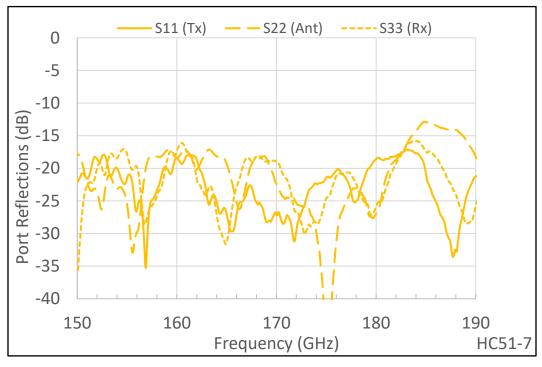






Asymmetry

Unlike the Y-junction circulator, the hybrid circulator is asymmetric. The path from port 3 to port 1 is internally terminated as shown in the schematic to the right and verified by the S_{13} trace in the measured data below. On request, the hybrid circulator can be assembled in a way that restores the symmetry if needed.

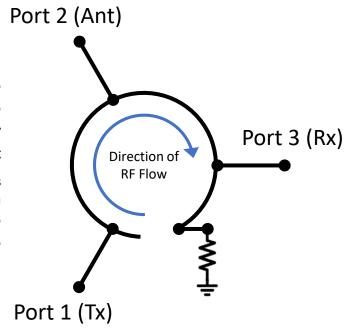

Asymmetric Insertion Loss

