

FR28

WR-2.8 waveguide isolator




MicroHarmonics

Superior mm-Wave Components


25-400 GHz

Specifications

Flange	WR-2.8
Frequency (GHz)	260-400
Insertion Loss (dB, typ)	3.8
Insertion Loss (dB, max)	5.6
Isolation (dB, typ)	22
Isolation (dB, min)	17
Input Return Loss (dB, typ)	17
Output Return Loss (dB, typ)	17
VSWR (max)	2.4:1
Maximum Power (W)	0.3
Diamond Heatsink	Yes

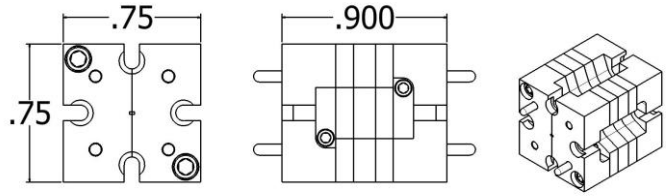

- ◆ Anti-cocking waveguide flanges
- ◆ Comprehensive test data
- ◆ Lowest insertion loss
- ◆ High isolation
- ◆ Compact size
- ◆ Diamond heatsinks
- ◆ Resist stray magnetic fields
- ◆ Internal waveguide screw access



Every isolator is tested on a vector network analyzer to ensure conformity and the test data is provided.

